


SLP

Pneumatic Sealless Combination Tool for Steel Strapping

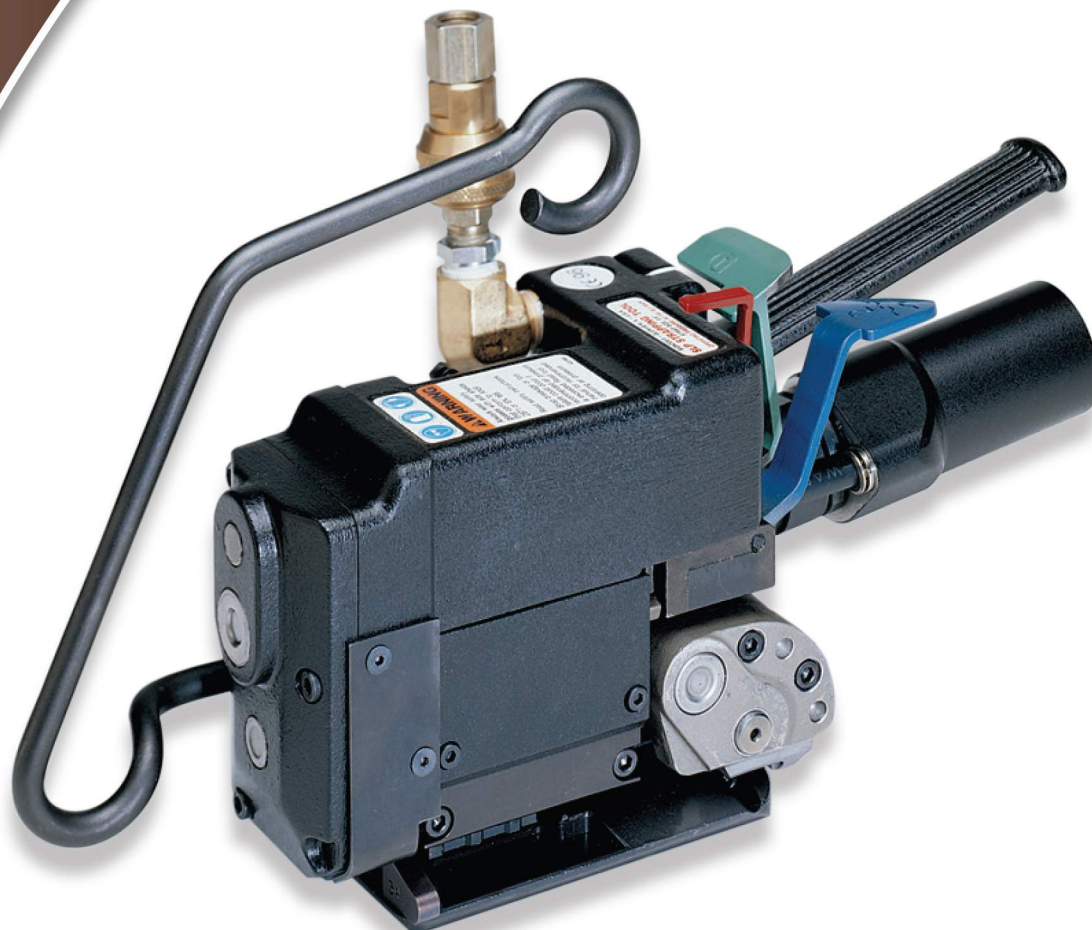

Easy to operate

The SLP is easy to handle and designed with ergonomics in mind. Its built-in suspension bracket further reduces operator fatigue.

Simple to maintain

It contains minimal wear parts that are easily accessible.

Versatile

Ideal for lumber, panel, paper, brick and block or metal products.

Durable

All metal and alloy parts provide long-lasting, low-maintenance operation.

Specifications

Strapping: For use with 1/2" - 3/4" (12 mm-19 mm) Apex Plus and Magnus® steel strapping in gauges from .017" - .025" (0.43 mm-0.64 mm)

Tension: 1/2" (12 mm) up to 500 lbs. (2 224 N) with high take-up speed
5/8"-3/4" (16 mm - 19 mm) up to 1,200 lbs. (5 338 N)

Joint type: Three key sealless

Weight: 15 lbs. (6.7 kg)

Part numbers:

SLP-12: 422350

SLP-58: 422355

SLP-34: 422360

©2015 SIGNODE SPD 1319 3-12-15



2661 American Drive
Troy, MI 48063

Toll Free: 866-STRAP-90

Phone: 248-616-0570

Fax: 248-616-0572

www.completepackagingproducts.com